


Software Operation Overview

Software operating interface

The main unit connects directly to the computer, allowing full control through the software. It supports real-time image display, autofocus, and enables annotation of specimen images, with options for length and area measurement.

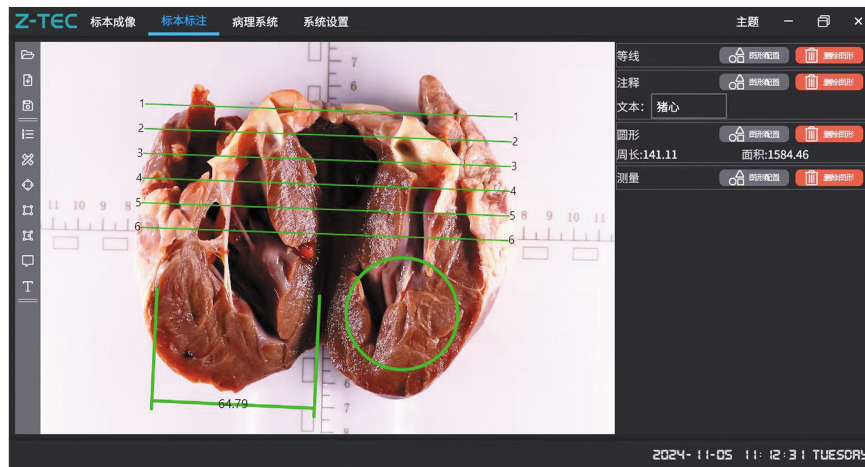

ZTEC PTE. LTD.

☎ 0065-86186174 ✉ Sales@Ztecsg.com

🏠 #07-54 Paya Lebar Square, 60 Paya Lebar Road, Singapore 409051

AUTHORIZATION:



WLX-1800 WLX-2400

Digital Imaging System For Gross Specimens

Digital Imaging System For Gross Specimens




This system is our latest digital imaging solution specifically tailored for pathology applications, ideal for laboratories handling high specimen volumes, requiring superior image quality, and supporting archival needs.

It delivers high-resolution imaging with fast capture speeds and is designed for simplicity in daily use. Pathologists can control the system through computer interface, gesture sensing, foot control, or manual positioning, allowing precise three-dimensional movement for optimal specimen visualization. The large-aperture optical zoom lens enables smooth transitions between wide-angle and telephoto views, essential for detailed examination and documentation. The workstation includes precise X and Y axis measuring scales and is resistant to acid, alkali, and wear, ensuring durability under rigorous laboratory conditions.

Three Axis Movemen



WLX-1800

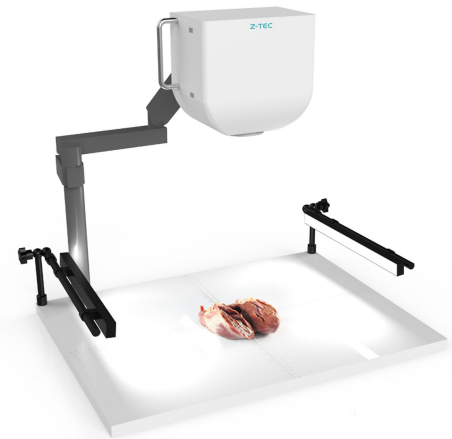

Number of Pixel	18 million
Anti-Shake Level	Level 3.5
Size of Sensor	22.3x14.9mm
Resolution	5184x3456
Optical zoom	2.5 times (FFL18-45mm)
Camera size	1080p
Aperture	F3.3-5.9
Control system	Computer control, Foot control, Manual positioning
Illumination	Double LED auxiliary lighting and base plate lighting, adjustable brightness
Movement pattern	The bracket moves in multiple directions and stays in any position
Workbench size	600x450mm with tape scale, acid and alkali resistant, super wear-resistant
Work space	1000x590mm Gross Table
Bracket can adjust the scope of the up and down	600mm

WLX-2400



Number of Pixel	24.1 million
Anti-Shake Level	Level 4
Size of Sensor	22.3x14.9mm
Resolution	6000x4000
Optical zoom	2.5 times (FFL18-45mm)
Camera size	4K
Aperture	F4.5-6.3
Display mode	1080p monitor, computer and 7" LED
Control system	Computer control, Gesture sensing, Foot control, Manual positioning
Illumination	Double LED auxiliary lighting and base plate lighting, adjustable brightness
Movement pattern	The bracket moves in multiple directions and stays in any position
Workbench size	600x450mm with tape scale, acid and alkali resistant, super wear-resistant
Work space	1000x590mm Gross Table
Bracket can adjust the scope of the up and down	600mm